VIPBRL2

PRODUCT DATA SHEET

Jūrmalas Mežaparki Ltd.
1 Garkalnes street, Jurmala
+371 6773 2317, www.jmp.lv

Construction is made from glued wood and plywood, stainless and galvanized steel metal, rope and HDPE and plastic details.



< 18
children


< 14
age

1,80 m
height of fall

45 kg
(heaviest part)

1755 kg


....
(without excavation and concreting)

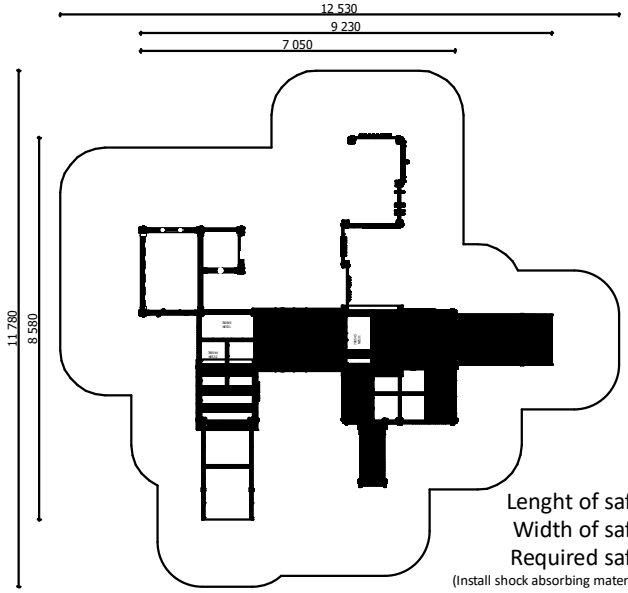

Lenght: **9 230 mm**
Width: **8 580 mm**
Height: **2 380 mm**

Lenght of safety area: **12 530 mm**
Width of safety area: **11 780 mm**
Required safety area: **97,53 m²**
(Install shock absorbing material according to EN 1176:2017)

Do not place stainless steel slide directly to south!

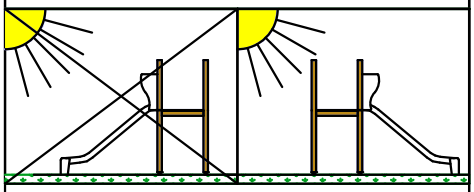



Foundation should be accessable for maintenance.

Playground equipment steel foundation is concreted in the ground at the planned location. The equipment can be used after two days when the concrete becomes solid. During assembly no children are allowed in the area.

Equipment safety checkings must be performend once in a week in high vandalism risk area.

Maintainance is required once in every 3 months, depending on usage.



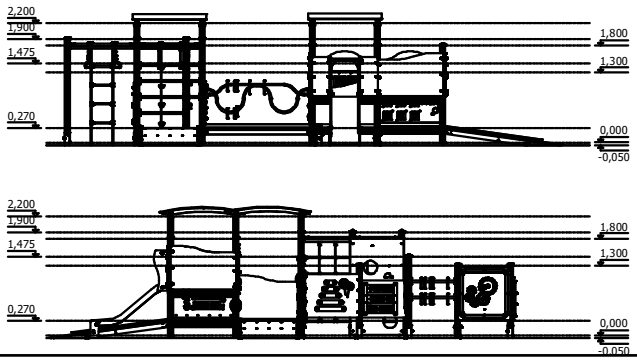

Transportation:

3 (tree) palettes:
2 200 x 1 000 x 500 mm
2 200 x 1 000 x 500 mm
2 200 x 1 000 x 500 mm

Spare parts:
All needed spare parts and elements, when warranty time expires can be ordered in Jūrmalas Mežaparki Ltd., and all the goods will be ready for delivery in 5 working days.

According to EN 1176:2017

Manufactured according:
07.11.2019.